

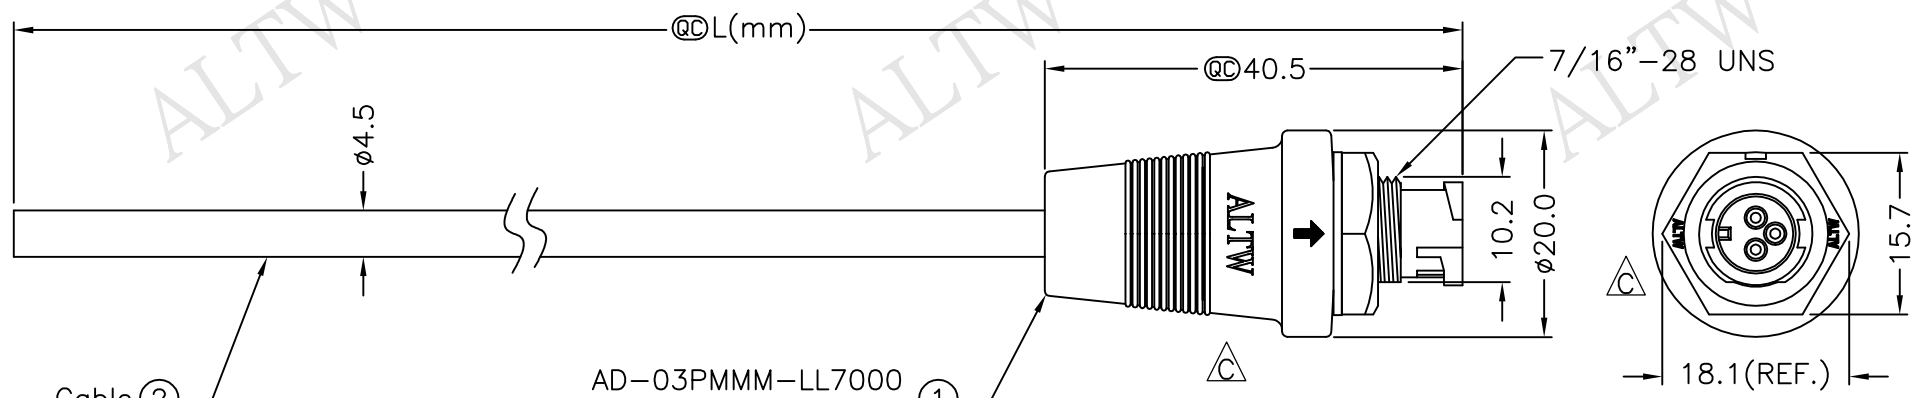
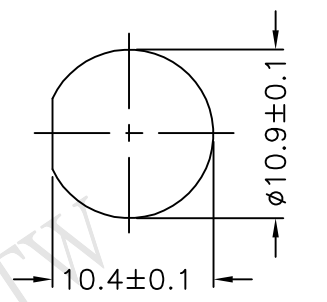


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8A0130~133	2008/09/10	Shin	Add Note
C	LEN15B0217~220	2015/11/02	Ruru	Change Logo & Note

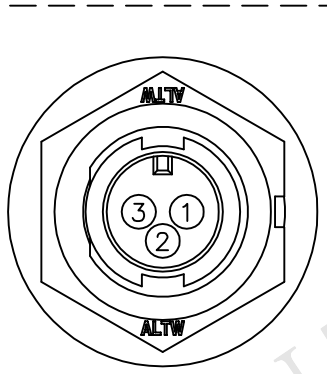

AD-03PMMM-LL7000
Color: Black

AD-03PMMM-LL7AXX
XX:01~99Meters
01:01Meter
02:02Meters
:
:
99:99Meters
Cable Length(L):01~99Meters



3	Black	黑
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*3C+Drain+A, PVC Jacket UV Resistant OD=4.5mm, Black
 - * Use with waterproof cap or dust cap
Panel Thickness Max: 2.5mm
 - * Use without waterproof cap or dust cap
Panel Thickness Max: 3.5mm
 - * Cable Length Tolerance: 01M: ± 40 mm
02M~05M: ± 60 mm
06M~10M: ± 100 mm
11M~30M: ± 200 mm
31M~99M: ± 500 mm

UNIT:mm	TOLERANCE	SCALE	SHEET	TITLE	Amphenol LTW	ITEM NO	DRAWN BY	DATE
± 0.5 mm	Free	1 OF 1	1	Mini Cable Lock 3Pin M Conn. M Pin	安費諾亮泰企業股份有限公司	AD-03PMMM-LL7AXX	Ruru	2015/11/02
REV. C	SIZE A4	@C :Inspection Item				CUSTOMER	CHECKED BY	DATE
						ALTW	Rita	2015/11/02
							APPROVED BY	DATE
							Lisa	2015/11/02

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.