




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Release	2013-06-27	Kevin Wang	

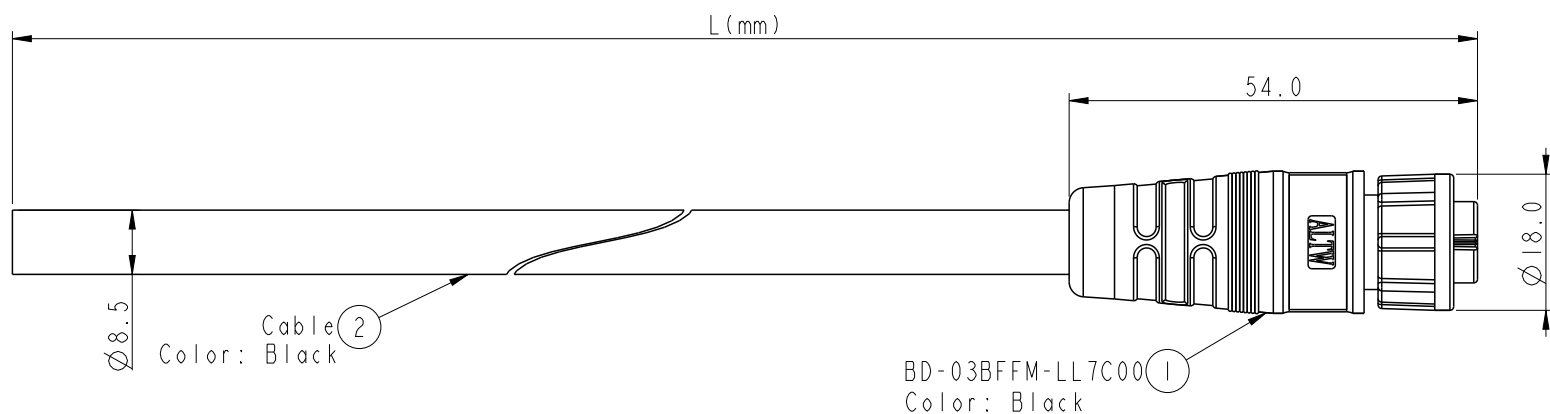

Conn.



Pin Assignments
Front View



BD-03BFFM-LL7CXX

- XX : 01~99Meters
- 01 : 01Meter
- 02 : 02Meters
- :
- :
- 99 : 99Meters

Cable Length(L): 01~99Meters

3	Green	綠
2	White	白
1	Black	黑
Conn.	Wire Color	
Pin Out		

Note:

- * Important Dimension To Check.
- * Waterproof Rate: IP67
- * Housing: M-PPE, Black.
- * Female Pin: Copper Alloy, Gold Plated.
- * Lock Nut: Nylon+GF, Black.
- * O-Ring: Silicon, Gray.
- * Cable: TC-ER 18AWG*3C+Filler, PVC Jacket, UV Resistant, OD=8.5, Black.
- * Working Voltage Rating: 300V AC
- * Working Current Rating: 5A
- * Withstanding Voltage: 6KV
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm		
TOLERANCE		
.X	±0.25	
.XX	±0.1	
.XXX	±0.05	
ANGLES	±1°	

TITLE STANDARD CABLE LOCK 3P F CONN F PIN			
SCALE: 33:100	SIZE: A4	SHEET 1 OF 1	
REV. A	WC-REV. A.5	Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Kevin	DATE 2013-06-27
DWG NO BD-03BFFM-LL7CXX	CHECKED BY Micky	DATE 2013-06-27
CUSTOMER ALTW	APPROVED BY Maslow	DATE 2013-06-27