



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0652~656	2010/11/26	Ivan	Change View.
C	LEN12B0092~097	2012/11/22	Vicky	Modify SR View.
D	LEN15C0426~431	2015/12/14	Ruru	Change Logo

△


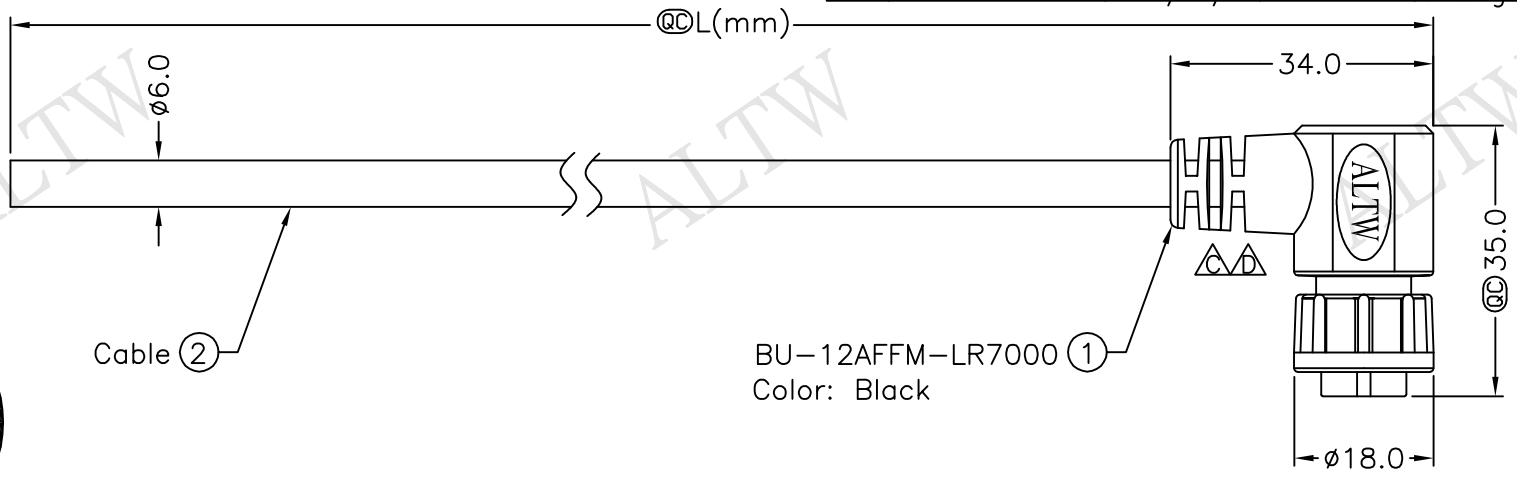


BU-12AFFM-LR7000 ①  
Color: Black

BU-12AFFM-LR7AXX  
XX:01~99Meter  
01:01Meter  
02:02Meters  
:  
:  
99:99Meters  
Cable Length(L):01~99Meters




- Note:
- \* @D Important Dimension To Check.
  - \* Waterproof Rate: IP67.
  - \* Housing: Nylon+GF, Black.
  - \* Female Pin: Copper Alloy, Gold Plated.
  - \* Cable: UL2464 26AWG\*12C+Drain+Al/My, PVC Jacket UV Resistant, OD=6.0, Black
  - \* Cable Length Tolerance: 01M:±40mm  
02M~05M:±60mm  
06M~10M:±100mm  
11M~30M:±200mm  
31M~99M:±500mm



Pin Assignments  
Front View

Light Green	淺綠	12
Purple	紫	11
Orange	橙	10
Black	黑	9
Red	紅	8
Pink	粉紅	7
Gray	灰	6
Yellow	黃	5
Green	綠	4
White	白	3
Blue	藍	2
Brown	棕	1
Wire Color		Conn.

Pin Out



UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard	
	Cable Lock 12Pin F Conn. F Pin	
SCALE	Free	SHEET 1 OF 1
REV.	D	SIZE A4 @C :Inspection Item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Ruru	2015/12/14
BU-12AFFM-LR7AXX	Rita	2015/12/14
ALTW	Lisa	2015/12/14

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.