


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1380258~261	2013/08/20	Ruru	Change Logo & Modify Note
C	C200914	2020/06/16	Ruru	ΔXX3

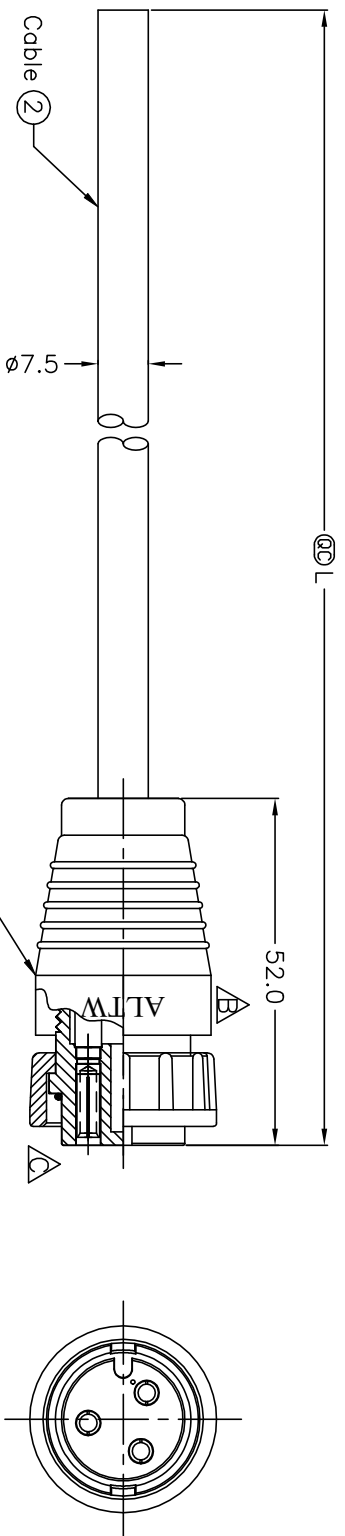


ALTW  
CONFIDENTIAL  
2020.06.16  
R&D DEPT.

DC-03BFFM-LL6AXX

DC-03BFFM-LL6000  
Color: Black

XX:01~99Meter  
01:01Meter  
02:02Meters

99:99Meters  
Cable Length(L):01~99 Meter



Black	黑	3
Blue	藍	2
Brown	棕	1
Wire Color		Conn.
Pin Out		

- △Note:
- \* Ⓞ Important Dimension.
  - \* Waterproof Rate: IP66
  - \* Housing: Thermoplastic, Black
  - \* Female Pin: Copper Alloy, Gold Plated
  - \* O-Ring: Rubber, Black
  - \* Lock Nut: Thermoplastic, Black
  - \* Cable: UL2464 16AWG\*3C+D+AL/My
  - UV Resistant OD=7.5mm, Black
  - \* Cable Length Tolerance: 01M:40mm  
02M~05M:60mm  
06M~10M:100mm  
11M~30M:200mm  
31M~99M:500mm

Pin Assignments  
Front View 前视图

TITLE  
0 CERES, D-20A, 03P, CABLE W/O SR  
F, F, MOLDING, 2LOCK

UNIT:mm  
TOLERANCE  
±0.5 mm

SCALE	1 : 1	SHEET	1 OF 1
REV.	C	SIZE	A4
		Ⓞ	inspection Item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DC-03BFFM-LL6AXX	DRAWN BY	Ruru	DATE	2013/08/20
DWG NO	DC-03BFFM-LL6AXX	CHECKED BY	Vicky	DATE	2013/08/20
CUSTOMER	ALTW	APPROVED BY	Rita	DATE	2013/08/20